



Solenoid valve 2/2 way N.C. Direct acting Explosion proof - Atex Ex d

21A3KIV15
÷
21A2KIV30

PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials. Aluminium coil housing, explosion proof "Ex d". Electrical and electromechanical components according to Atex Directive 94/9/CE

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

USE: Potentially explosive atmospheres
Zone 1, 2, 21, 22

PIPES: G 1/8 - G 1/4


COIL: 8W - Ø 13
BDA 155°C (class F)

Max. allowable pressure (PS) 40 bar
Housing ambient temperature - 40°C + 60°C



Gaskets	Temperature		Medium
V=FKM (fluoroelastomer)	- 10°C	+ 80°C	Mineral oils (2°E), gasoline gas oil, fuel oils (7°E)
F=H-NBR (hydrogenated nitrile)	- 10°C	+ 80°C	Air, inert gas, water R 134a, R 404a

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A2KIV20.

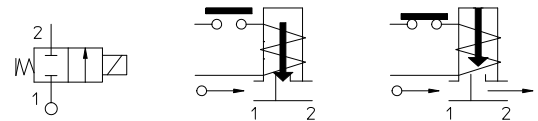

Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power (watt)	Pressure				
		cSt	°E				min bar	M.O.P.D. AC bar DC bar			
G 1/8	21A3KIV15	12	~ 2	1,5	1,4	8	0	30	18		
	21A3KIV20	37	~ 5	2	2			22	16		
	21A3KIV25	53	~ 7	2,5	3,2			14	9		
	21A3KIV30			3	4			10	6		
G 1/4	21A2KIV15	12	~ 2	1,5	1,4			8	0	30	18
	21A2KIV20	37	~ 5	2	2					22	16
	21A2KIV25	53	~ 7	2,5	3,2					14	9
	21A2KIV30			3	4					10	6


(According to Directive 94/9/CE ATEX)
II 2G Ex d II C T6
II 2D Ex tD A21 IP67 80°C



Note

Available on request and with minimum quantities.
Also available with brass body without lead.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

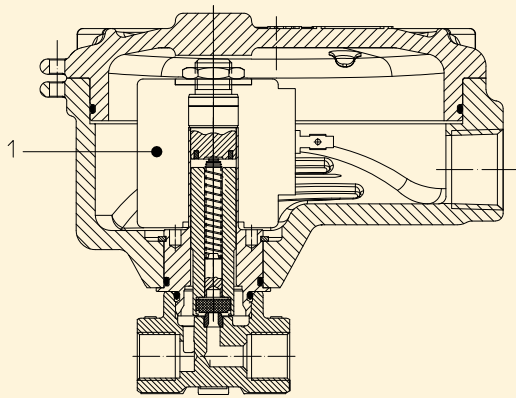

MATERIALS:

Body Brass - UNI EN 12165 CW617N
Armature tube Stainless steel AISI series 300
Fixed core Stainless steel AISI series 400
Plunger Stainless steel AISI series 400
Phase displacement ring Copper - Cu 99,9%
Spring Stainless steel AISI series 300
Seal Standard: V=FKM
 On request: F=H-NBR
Orifice: Insert slot Stainless steel AISI series 300
Housing Aluminium die cast

Connector conformity ISO 4400

FEATURES:

Electrical conformity IEC 335


SPARE PARTS:

- 1. Coil:**
 BDA08012CS
 BDA08024CS
 BDA08024DS
 BDA08048AS
 BDA08048CS
 BDA08110CS
 BDA08110DS
 BDA08223DS

ACCESSORIES:

Code P992219 Cable Gland
(to be ordered separately)

DIMENSIONS:

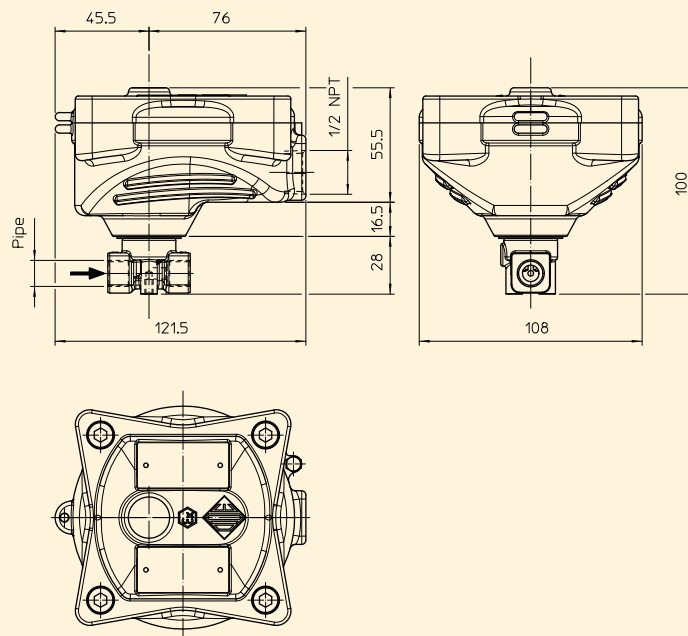

COIL TYPE	POWER ABSORPTION		
	W	Hold VA ~	Inrush VA ~
B	8	14,5	25



Solenoid valve 2/2 way N.O. Direct acting Explosion proof - Atex Ex d

21A3ZIV15
÷
21A2ZIV30

PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials. Aluminium coil housing, explosion proof "Ex d". Electrical and electromechanical components according to Atex Directive 94/9/CE

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

USE: Potentially explosive atmospheres
Zone 1, 2, 21, 22

PIPES: G 1/8 - G 1/4


COIL: 8W - Ø 13
BDA 155°C (class F)

Max. allowable pressure (PS) 40 bar
Housing ambient temperature - 40°C + 60°C



Gaskets	Temperature		Medium
V=FKM (fluoroelastomer)	- 10°C	+ 80°C	Mineral oils (2°E), gasoline gas oil, fuel oils (7°E)
F=H-NBR (hydrogenated nitrile)	- 10°C	+ 80°C	Air, inert gas, water R 134a, R 404a

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21A2ZIF20.

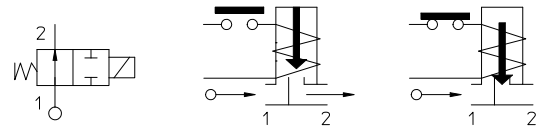

Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power (watt)	Pressure				
		cSt	°E				min bar	M.O.P.D. AC bar DC bar			
G 1/8	21A3ZIV15D	12	~ 2	1,5	1,4	8	0	25	25		
	21A3ZIV20D	37	~ 5	2	2			20	20		
	21A3ZIV25D	53	~ 7	2,5	3,2			14	14		
	21A3ZIV30D			3	4			10	10		
G 1/4	21A2ZIV15D	12	~ 2	1,5	1,4			8	0	25	25
	21A2ZIV20D	37	~ 5	2	2					20	20
	21A2ZIV25D	53	~ 7	2,5	3,2					14	14
	21A2ZIV30D			3	4					10	10


(According to Directive 94/9/CE ATEX)
II 2G Ex d IIC T6
II 2D Ex tD A21 IP67 80°C



Note

Available on request and with minimum quantities.
Also available with brass body without lead.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

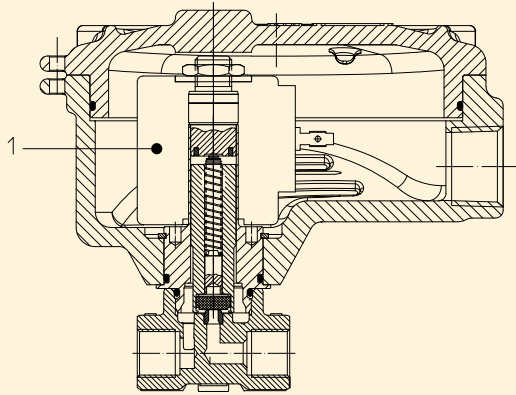

MATERIALS:

Body	Brass - UNI EN 12165 CW617N
Armature tube	Stainless steel AISI series 300
Fixed core	Stainless steel AISI series 400
Plunger	Stainless steel AISI series 400
Phase displacement ring	Copper - Cu 99,9%
Spring	Stainless steel AISI series 300
Seal	Standard: V=FKM On request: F=H-NBR
Orifice: Insert slot	Stainless steel AISI series 300
Housing	Aluminium die cast

Connector conformity ISO 4400

FEATURES:

Electrical conformity IEC 335


SPARE PARTS:

- 1. Coil:**
 BDA08012CS
 BDA08024CS
 BDA08024DS
 BDA08048AS
 BDA08048CS
 BDA08110CS
 BDA08110DS
 BDA08223DS

ACCESSORIES:

Code P992219 Cable Gland
 (to be ordered separately)

DIMENSIONS:

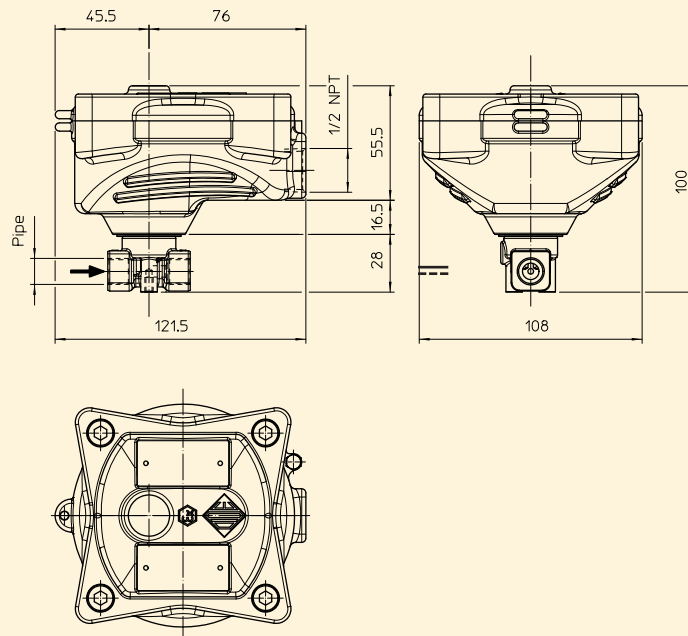

COIL TYPE	POWER ABSORPTION		
	W	Hold VA ~	Inrush VA ~
B	8	14,5	25