

Inside casing ground

Version with extension

### WIRING

- |   |                                 |
|---|---------------------------------|
| 1 | Common power supply             |
| 2 | Power supply 110 Va.c. 50/60 Hz |
| 3 | Power supply 220 Va.c. 50/60 Hz |
| 4 | NC contact 5A/250 Va.c.         |
| 5 | Common contacts                 |
| 6 | NO contact 5A/250 Va.c.         |

Electric motor draw 4 W


Ambient temperature range -20 to +80 °C

Weight : 1.200 Kg

On request power supply at 24/48 Va.c. 50/60Hz

And also at 24 Vd.c.

Maximum operational pressure 1.1 bar

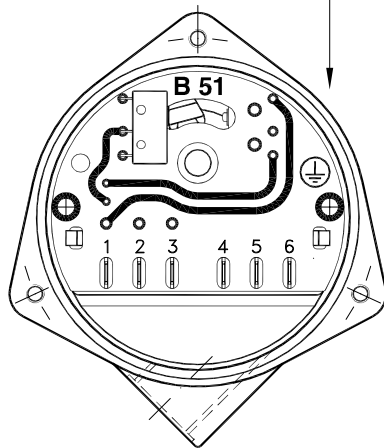

IP65 Protection

Heat resistant up to 200°C

Die-cast aluminium casing  
UNI5076

Standard AC1 1 vane  
Stainless Steel screw.

Wiring with antivibrations  
cable terminals (Faston).

SMALL-SIZED BLADED LEVEL GAUGE PARTICULARLY SUITABLE FOR USE ON SMALL TANKS OR BATCHING CELLS.

STANDARD ASSEMBLY WITH 1"1/2 GAS THREADED SLEEVE

PARTS IN CONTACT WITH THE PRODUCTS ARE MADE OF STAINLESS STEEL

Certificate number TÜV 03 ATEX 2374 X  
Marking: II 1/2D T200°C IP65

