



SLEEVE



Declaration of Conformity CL 07 ATEX 0206
 Marking: II 3GD EX n T4 IIB Ex GD A22 T120 °C IP65

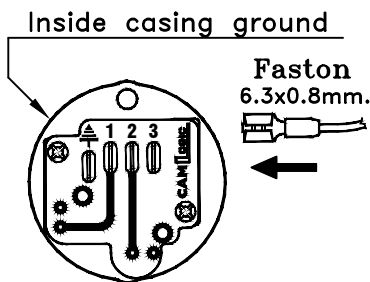

- 1 N.O. contact
 - 2 Com. contact
 - 3 N.C. contact
- 10A 250V.a.c.

Die-cast aluminium casing UNI5076

Sleeve and float in Stainless Steel 18/10

Articulation covering manufactured in rubber

Horizontal assembly with sleeve

Wiring with antivibrations cable terminals (Faston)

Ambient temperature range -10 to +120 °C

Weight : 1.650 Kg Max pressure 25 bar

Protection IP65



WATERPROOFING IS 100 % GUARANTEED – THE FLOAT MOVEMENT IS TRANSMITTED BY MEANS OF MAGNETIC INDUCTION – THERE ISN'T ANY LIQUID PASSAGE BETWEEN THE TANK AND THE GAUGE INNER PART.